

LUXORJET

1. White colour as a background on the whole surface of the glass trophy
2. White colour as a background under the colour pixels
3. Slightly transparent colour print (without a white colour)

Tips when preparing the artwork by yourself

LUXORJET

if the coloured background has to reach the edge of the glass,
extend it beyond the outline of the glass 8 mm on each side

minimum resolution for illustrations
or photos 300 dpi

**The artwork should be prepared
in CMYK palette**

external outline of the glass - TEMPLATE
please do not change the color
and thickness of the line


all fonts converted to curves

smallest font used **8 pt**

minimum thickness of lines used
in the design **0.2 mm**

! Because of manual processing of the glass trophies, template may slightly differ from the final product.

an area where essential elements should be placed, i.e. text, logo, etc.

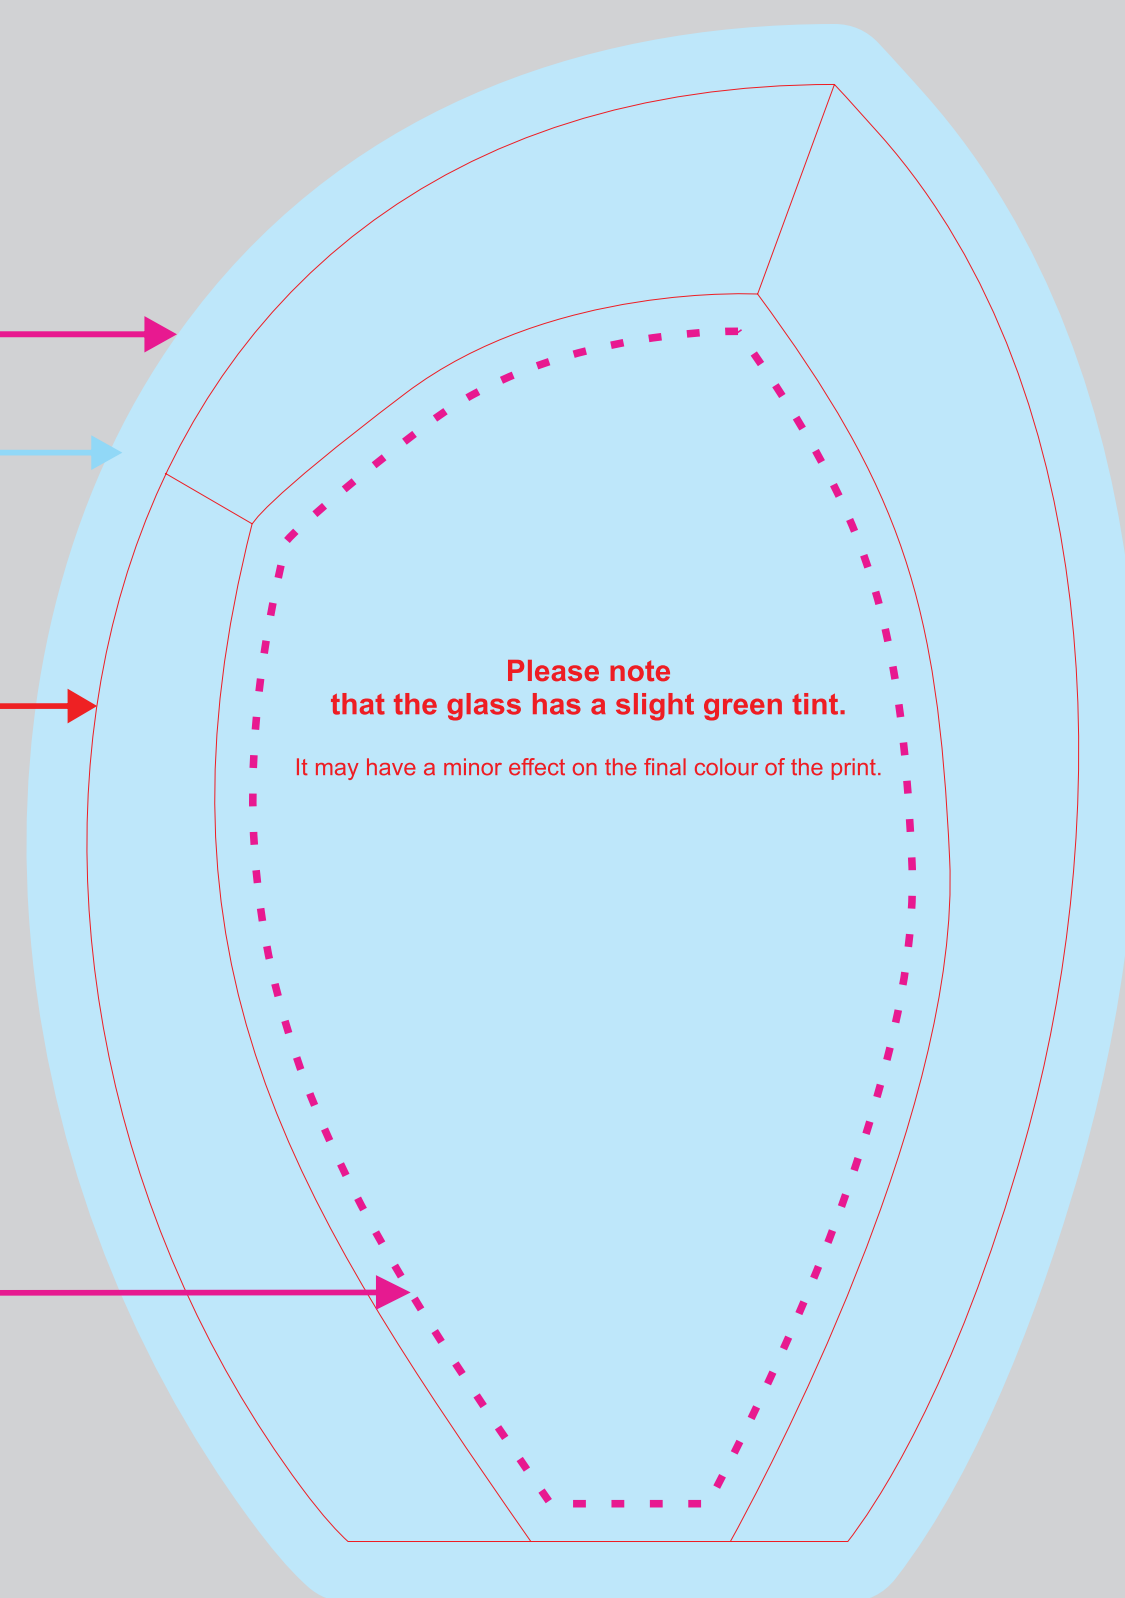

G010

ENGRAVING

Tips when preparing the artwork by yourself

- external outline of the glass - **TEMPLATE**
please do not change the color
and thickness of the line
- all fonts converted to curves**
- smallest font used **8 pt**
- minimum thickness of lines used
in the design **0.2 mm**
- laser engraving area**
 - we only use vector objects
(inscriptions, logos, characters)
 - the pattern for engraving will be prepared
in grey using 70 % black in **C M Y K** scale
 - when filling with paint, **please specify colour**
(paint palette in separate file)
 - distance of the lowest inscription
from the base **20 mm**

ENGRAVING

! Because of manual processing of the glass trophies,
template may slightly
differ from the final product.



G010